TECH DATA SHEET

NEXUS PROJOINT™ CONTRACT SBR

PROPREP TECHNOLOGY




PROJOINT CONTRACT SBR is an APEO-free, water-based emulsion of a modified styrene butadiene polymer.
Designed for use to improve the performance of sand and cement mixes and also for priming surfaces to promote adhesion. It has nonfoaming properties which controls the density of mortar and results in a significant increase in compressive, tensile and flexural strength.

APPLICATION INSTRUCTIONS:

PROJOINT CONTRACT SBR can be applied neat to the underside of paving substrates as a primer and adhesion promoter.

Protective gloves should be worn when using this product.
The addition rate depends on the application and full details are available in the technical data sheet. As a guide, a typical addition is 200ml per 1kg of cement.

Please note that this addition will reduce the amount of water needed
in the mix and will also reduce the pot life of the mixed mortar.

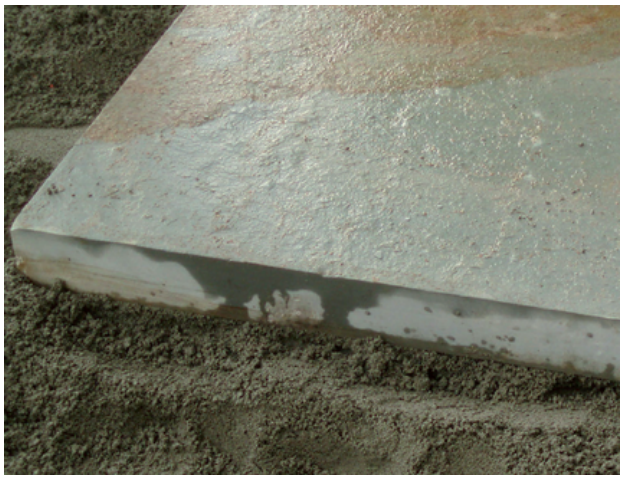

Please note that **PROJOINT CONTRACT SBR** is **not** recommended for use as a primer for porcelain paving; for this application use **PROJOINT PORCELAIN PRIMER.**



IMPORTANT: Always test in a hidden area prior to use and only proceed when satisfied with the results. The technical information supplied is based on data obtained by our own research and is considered accurate.
However, no liability is accepted for any loss or damage arising directly or indirectly from the use of our products, or from the information given in publications. Prospective users should therefore satisfy themselves by appropriate trials that the product is suitable for the intended use.

WASH HANDS AND EXPOSED SKIN AFTER USE.

KEEP OUT OF THE REACH OF CHILDREN AND ANIMALS

MAY PRODUCE AN ALLERGIC REACTION

PRECAUTIONARY STATEMENTS: SKIN CONTACT: Repeated or prolonged skin contact may cause irritation. After contact with skin, take off immediately all contaminated clothing, and wash immediately with plenty of water. **EYE CONTACT:** In case of contact with eyes, rinse immediately
with plenty of water and seek medical advice. **INGESTION:** Ingestion may cause nausea and vomiting. Rinse mouth out with water. If accidentally swallowed, rinse the mouth with plenty of water (only if the person is conscious) and obtain immediate medical attention.

STORAGE: PROJOINT CONTRACT SBR should be stored in a well-ventilated place between temperatures of between 5 and 40°C, for no longer than 6
months. If stored in temperatures out of these parameters, or in direct sunlight for long periods, the quality of the product may be affected. **Protect from frost.**

CONTAINS A MIXTURE OF: 5-chloro-2-methyl-2H isothiazol-3-one [EC No 247-500-7] and 2-methyl-2H-isothiazol-3-one (EC No 220-239-6] (3:1), 1,2-benzisothiazo-3(2H)-one, 2-methyl-4-isothiazolin-3-one.



KEY FACTS:

- PROMOTES ADHESION OF NATURAL STONE AND CONCRETE PAVING TO SUBSTRATES
- SOLIDS CONTENT OF OVER 30%
- IMPROVES STRENGTH AND WORKABILITY OF SAND AND CEMENT MORTAR
- EXCELLENT FREEZE : THAW RESISTANCE
- INCREASES WATER RESISTANCE AND DURABILITY OF MORTAR
- APEO FREE AND WATERBASED