

# Pro-810™ Paving Sealer

## Application instructions and technical overview

**Pro-810™** is a high performance, solvent based surface sealer which has an **invisible finish** and can be applied to all types of natural stone. It deeply impregnates the stone and protects surfaces from water penetration, staining and the effects of natural weathering whilst remaining breathable. Pro-810™ does not change the colour or texture of the surface and can be used on virtually all porous surfaces, particularly high quality natural stone.

Suitable for indoor and outdoor use.

### preparation

Substrates should be sound, clean and free from dirt, dust, oil, etc and **must be totally dry**. *We recommend cleaning with Nexus Paving & Driveway Cleaner prior to application.*


As with all sealants, always try a small inconspicuous test area before full application.

### application

**Pro-810™** Paving Sealer is designed as an invisible coating but may darken very light surfaces slightly. The sealer is supplied ready for use and should be applied when the **surface temperature is between 5°C and 30°C**.

Application may be made by brush, roller or spray. Apply a complete, even coat over the whole surface ensuring any excess is removed. Allow to dry and repeat application with a thin and even second coat to provide increased protection. **Protect from rain until cured** - dryness will normally occur within 2 hours with full curing taking up to 24 hours.

We recommend using white spirit to clean brushes and/or rollers.

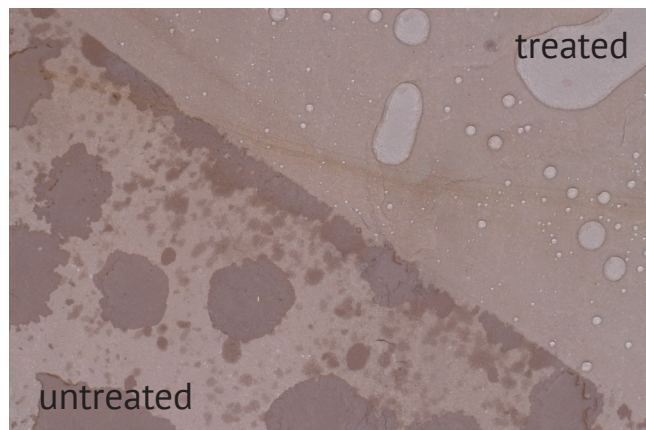

### coverage

**Pro-810™** covers approximately 7 to 12m<sup>2</sup> per litre per coat, depending on substrate porosity.

For storage and health and safety information, a full data sheet is available on request.

Order code:	Item Description:	Colour:	Pack Size:	Pallet Qty:
PRO8101	Pro-810™ Paving Sealer	Invisible	1 litre	box qty: 12
PRO8105	Pro-810™ Paving Sealer	Invisible	5 litres	160
PRO81025	Pro-810™ Paving Sealer	Invisible	25 litres	24