

# TECH DATA SHEET

# PROJOINT PRO810

## INVISIBLE SEALER

### PROFESSIONAL SOLVENT BASED INVISIBLE IMPREGNATING SEALER

PROSEAL TECHNOLOGY



#### PREPARATION:


SUBSTRATES SHOULD BE SOUND, CLEAN AND FREE FROM DIRT, DUST, OIL, ETC AND MUST BE TOTALLY DRY. WE RECOMMEND CLEANING WITH NEXUS PAVING & DRIVEWAY CLEANER PRIOR TO APPLICATION AND LEAVE TO DRY FOR AT LEAST TWO DAYS. **IT IS VERY IMPORTANT** THAT THE PAVING IS LEFT TO ALLOW ALL MOISTURE WITHIN THE PAVING TO DISAPPEAR. PROJINT PRO810 INVISIBLE SEALER IS DESIGNED AS AN INVISIBLE COATING BUT MAY DARKEN VERY LIGHT SURFACES SLIGHTLY. AS WITH ALL SEALANTS, TEST ON A SMALL INCONSPICUOUS AREA BEFORE FULL APPLICATION. THE SEALER IS SUPPLIED READY FOR USE AND SHOULD BE APPLIED WHEN THE SURFACE TEMPERATURE OF THE PAVING IS BETWEEN 5°C AND 25°C. AS A GUIDE, THE STONE SHOULD BE COOL TO THE TOUCH.

#### APPLICATION INSTRUCTIONS:

**1:** WEARING APPROPRIATE PPE, APPLY PROJINT PRO-810 EVENLY USING A FOAM ROLLER, PAINT BRUSH, OR A LOW-PRESSURE SPRAYER, ENSURING EXCESS IS REMOVED. **2:** ALLOW TO DRY (UP TO 2 HOURS DRYING TIME) AND THEN REPEAT APPLICATION OF A THIN AND EVEN SECONDARY COAT FOR ENHANCED PROTECTION. **3:** ALL TOOLS/EQUIPMENT SHOULD BE THOROUGHLY CLEANED WITH A SUITABLE SOLVENT SUCH AS WHITE SPIRIT AFTER USE.

**IMPORTANT:** ALWAYS TEST IN A HIDDEN AREA PRIOR TO USE AND ONLY PROCEED WHEN SATISFIED WITH THE RESULTS. THE TECHNICAL INFORMATION SUPPLIED IS BASED ON DATA OBTAINED BY OUR OWN RESEARCH AND IS CONSIDERED ACCURATE. HOWEVER, NO LIABILITY IS ACCEPTED FOR ANY LOSS OR DAMAGE ARISING DIRECTLY OR INDIRECTLY FROM THE USE OF OUR PRODUCTS, OR FROM THE INFORMATION GIVEN IN PUBLICATIONS. PROSPECTIVE USERS SHOULD THEREFORE SATISFY THEMSELVES BY APPROPRIATE TRIALS THAT THE PRODUCT IS SUITABLE FOR THE INTENDED USE. DO NOT DISCHARGE WASTE INTO DRAINS OR RIVERS.

SYSTEM	SOLVENT BASED SEALER
STORAGE	STORE IN A COOL, AND DRY AT TEMPERATURES BETWEEN 5°C AND 25°C
SHELF LIFE	12 MONTH FROM DATE OF MANUFACTURE
PACKAGING	1LTR, 5LTR AND 25LTR CONTAINERS
DRYING TIME	UP TO 2 HOURS IN DRY AMBIENT CONDITIONS
COVERAGE	APPROXIMATELY 7-12SQM PER LTR

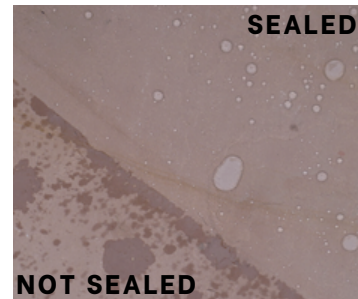

## KEY FACTS:

- ✓ PROFESSIONAL GRADE WATER REPELLENT FOR POROUS NATURAL STONE AND CONCRETE
- ✓ BREATHABLE, INVISIBLE FINISH, SEALS AND PROTECTS
- ✓ RESISTS DIRT, GRIME AND ALGAE
- ✓ LONG LASTING PROTECTION AND UV STABLE
- ✓ DEEPLY IMPREGNATING
- ✓ HIGH COVERAGE RATE

**KEEP OUT OF THE REACH OF CHILDREN AND ANIMALS  
MAY PRODUCE AN ALLERGIC REACTION**

**HAZARD STATEMENTS:** Flammable liquid and vapour. May be fatal if swallowed and enters airways. May cause drowsiness or dizziness. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. Avoid breathing vapour/spray. Do **NOT** induce vomiting. In case of fire, use carbon dioxide (CO2) or dry chemical extinguisher. Do not use water. Repeated exposure may cause skin dryness or cracking.

**PRECAUTIONARY STATEMENTS:** Contact with eyes and skin should be avoided. **IF ON SKIN:** Wash with plenty of soap and water. **IF IN EYES:** Wash with plenty of water. If medical advice is needed, have a product container or label at hand. Do not use for medical or hygiene purposes. Do not mix with any other preparations. Not to be taken internally.

**CONTAINS:** HYDROCARBONS, C9 - C11, n-alkanes, isoalkanes, cyclics, <2% aromatics.

**UN number:** 1950 **Technical data:** S.G. 0.85  
**Touch dry** 2-3 hours. **Fully dry** 24 hours.

**STORAGE:** Store in sealed containers protected from frost and extremes of temperature.

**COVERAGE:** This product covers approximately 7-12m<sup>2</sup> per litre depending on substrate porosity.

## BRUTE STRENGTH PAVING PRODUCTS

